

Outdoor Zip Blinds





Zipper Track Blinds



RS-100 Single Layer



RS-120 Single Layer



RS-130*180 Dual Layer



RS-100 Single Layer
(Without Cassette)




RS-120 Single Layer
(Without Cassette)



RS-130*180 Dual Layer
(Without Cassette)

WINDPROOF OUTDOOR ROLLER BLINDS

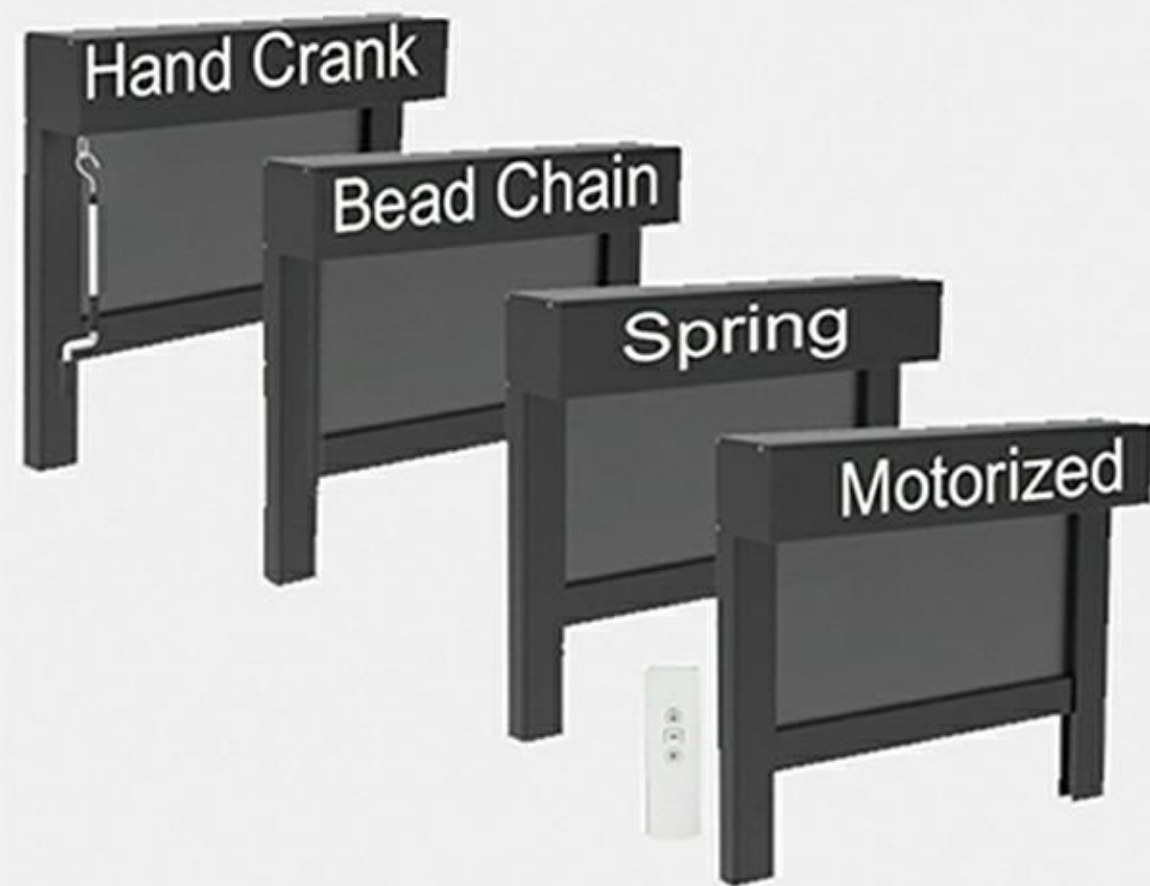

Strong wind
resistance



Sunshade



Keep out
the rain



Thermal
insulation






Temperature
control



Beautify the
environment

Outdoor and indoor universal windproof roller blinds series

- 1.Width can up to 6 meters, super wide windproof blinds special system;
- 2.The surface section is flat and straight, and the tube is never bent;
- 3.Strong side rail, strong wind resistance;
- 4.Easy to install on site;
- 5.Motor maintenance system without disassembling the whole windproof blinds;
- 6.Beautiful appearance, exquisite;

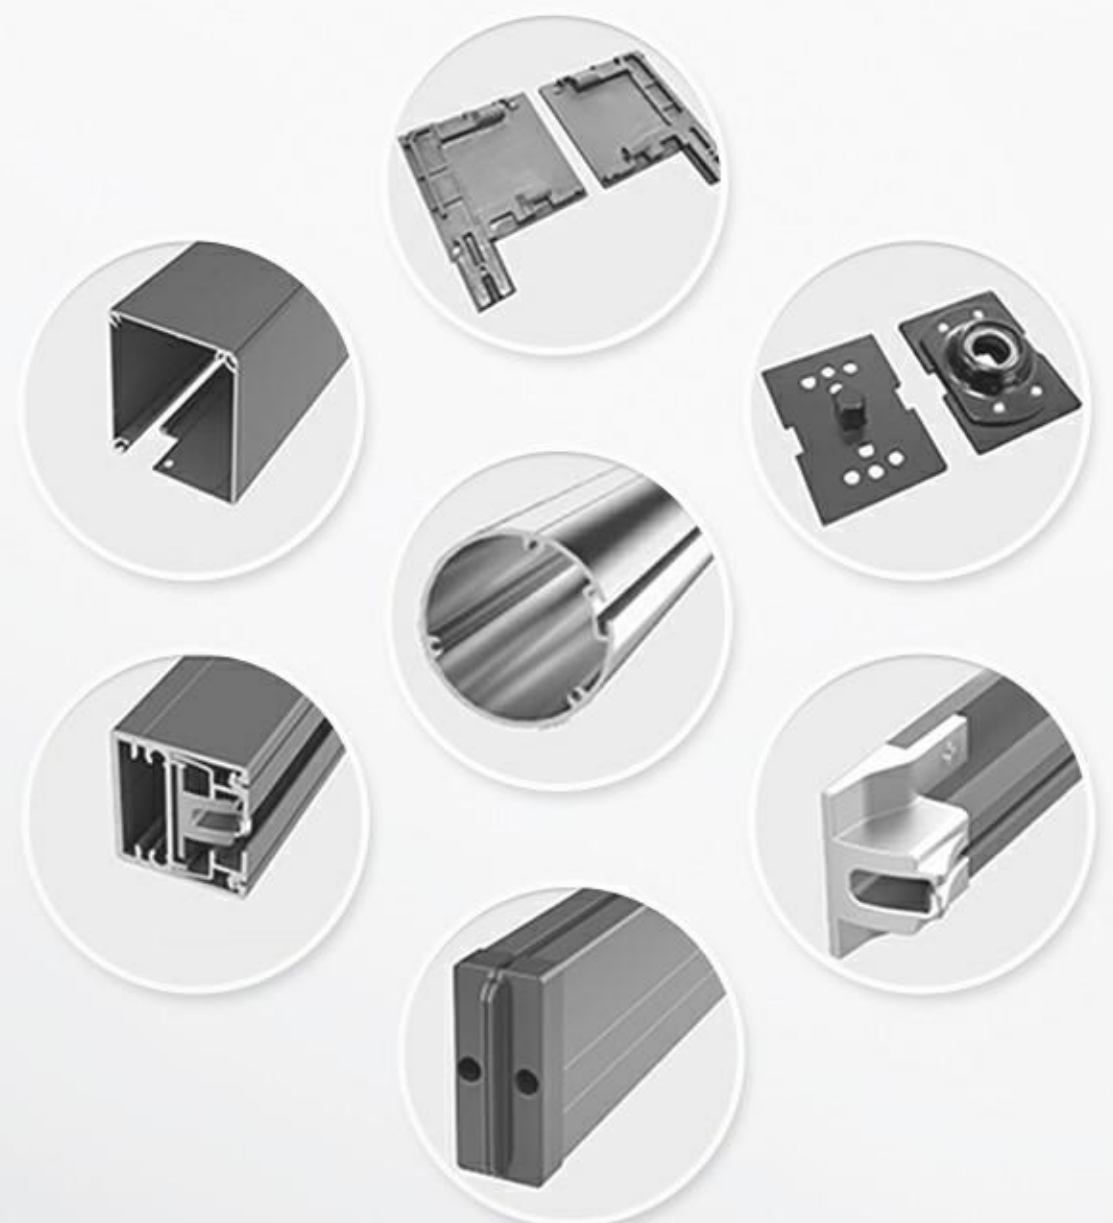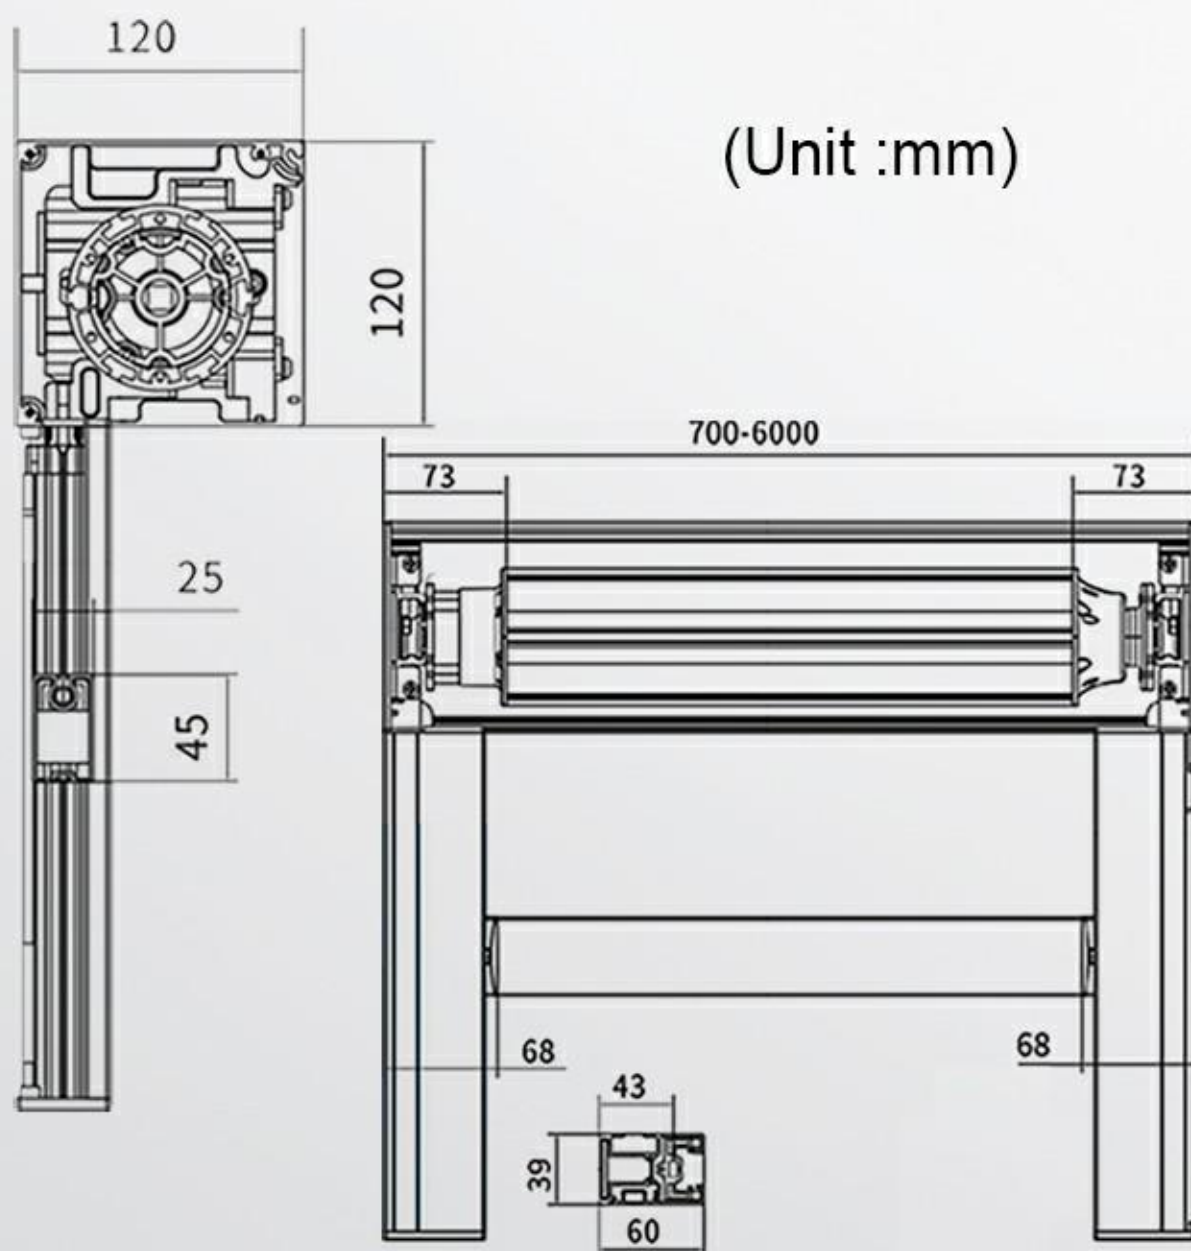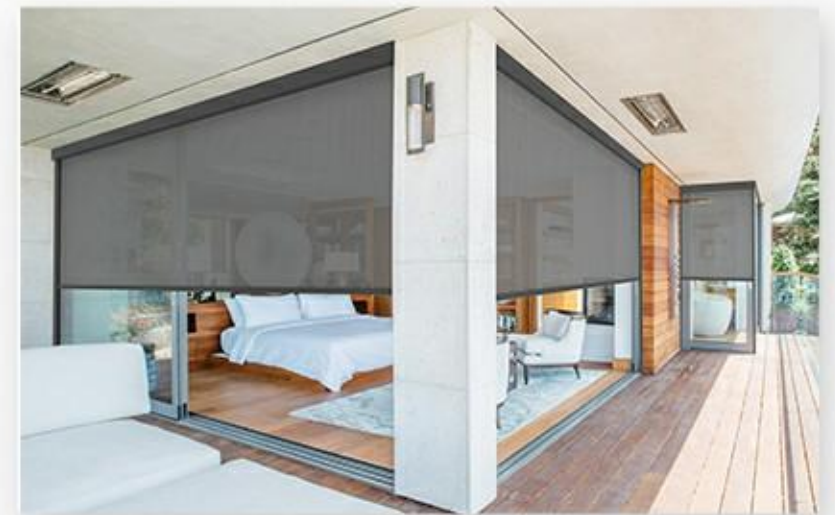

Solid and Durable

Anti-oxidation treatment does not discolor




Cover cap

Side track


Top tube option

Bottom rail


3 Colours Available for Frames

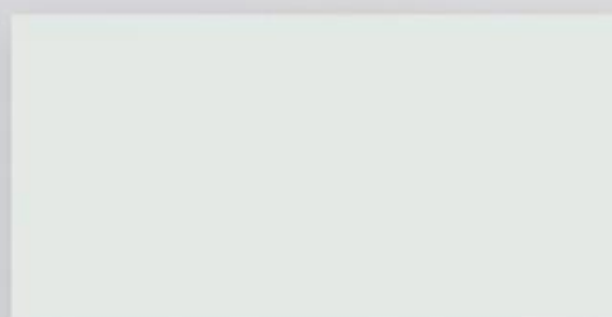

White

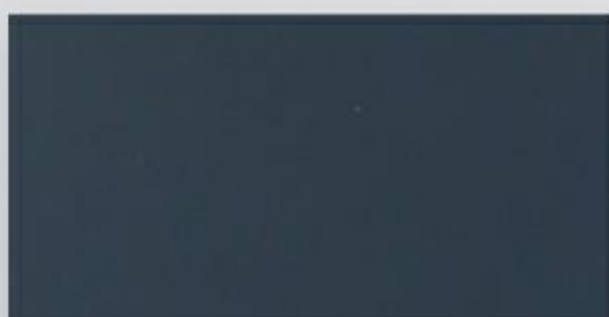


Ironstone

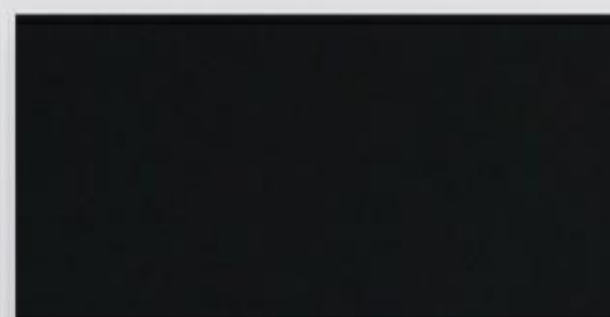

Black

Side track bottom rail comes with fabric smoothing device, to solve the fabric wrinkle caused by welding edge rolling, so that the overall flatness is very high.

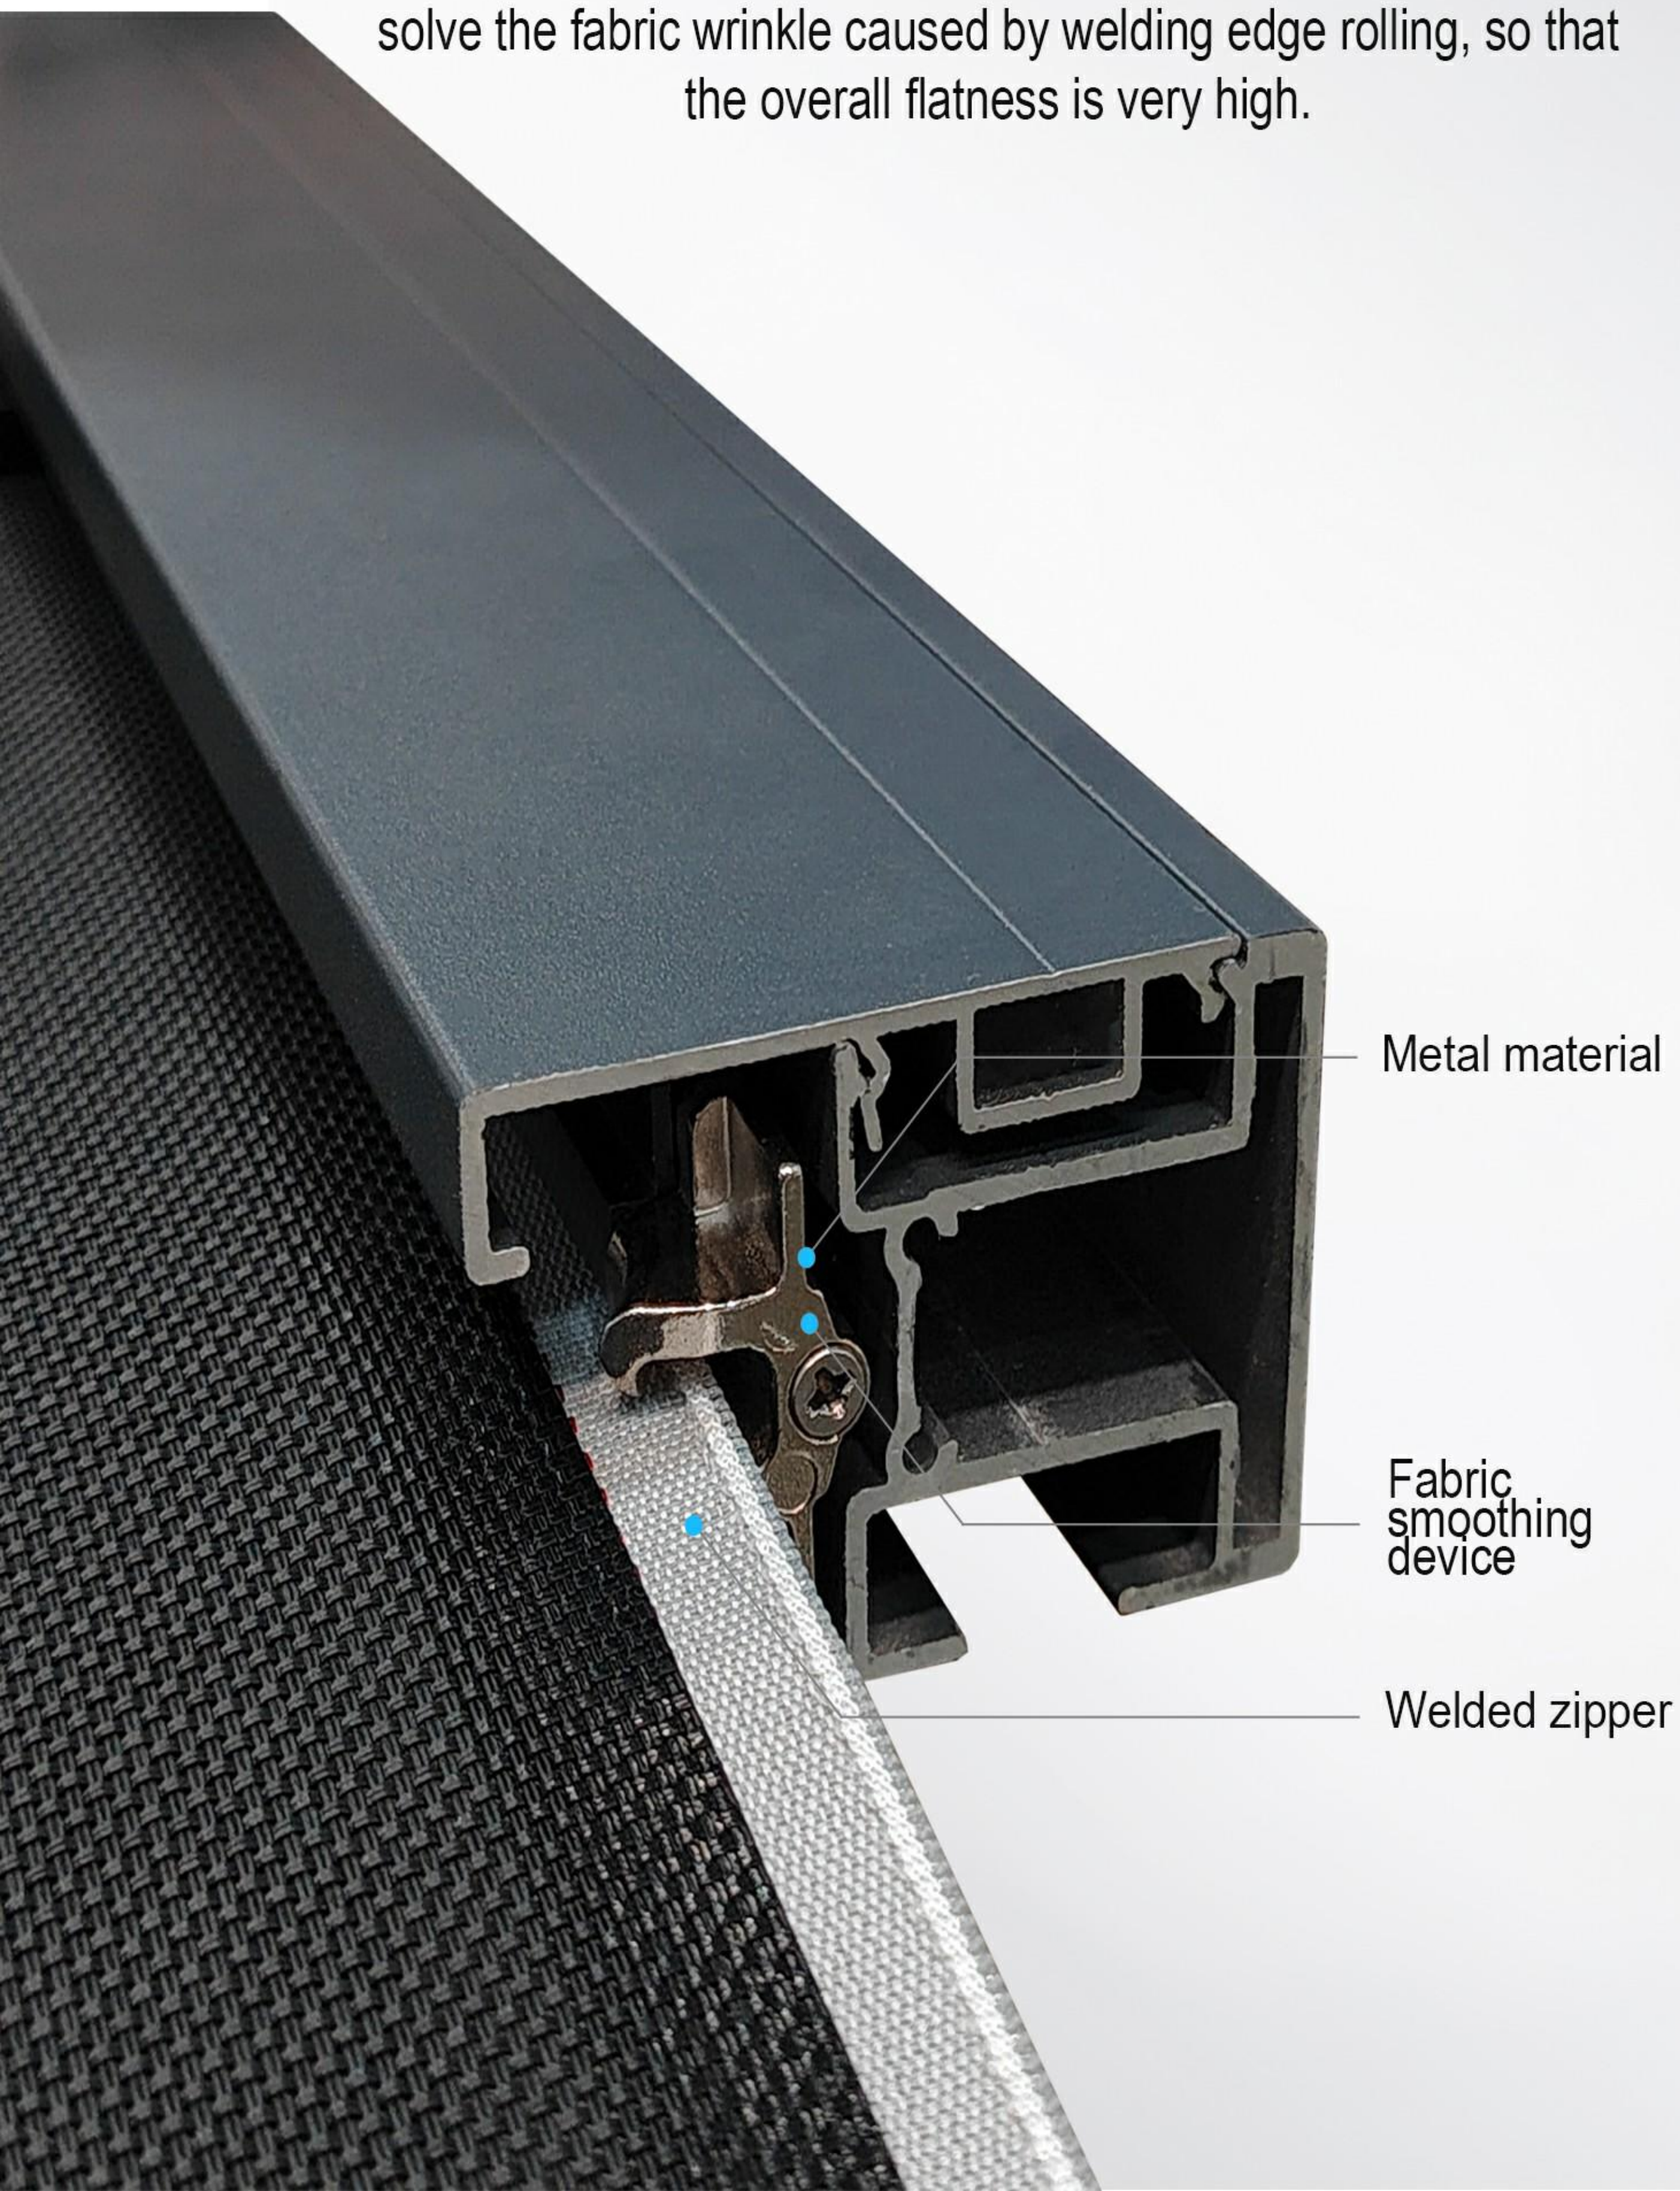

4 Operating Systems



1. Motorized windproof roller blinds



2. Spring windproof roller blinds




3. Chain control windproof roller blinds




4. Hand crank windproof roller blinds


Fabric Colours




White * White

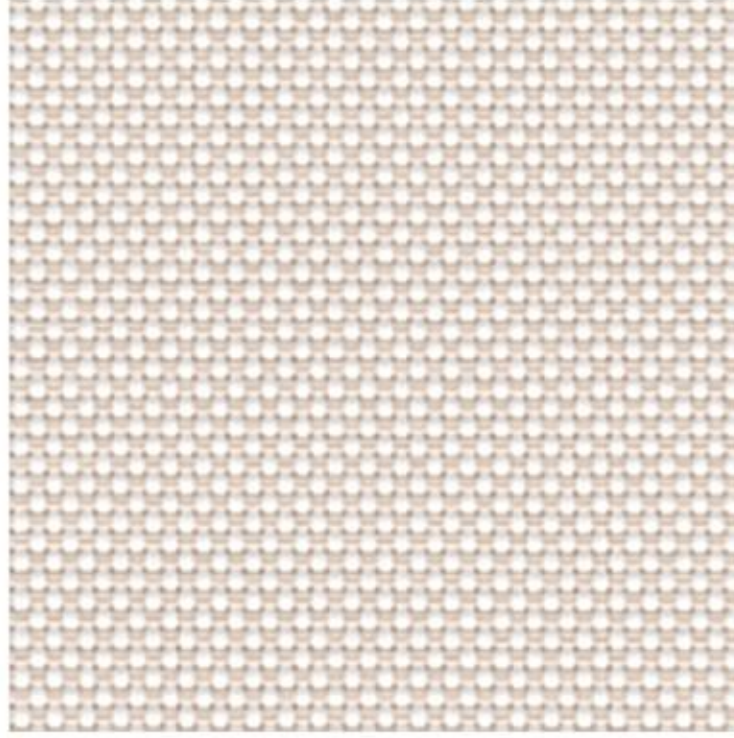


White * Linen

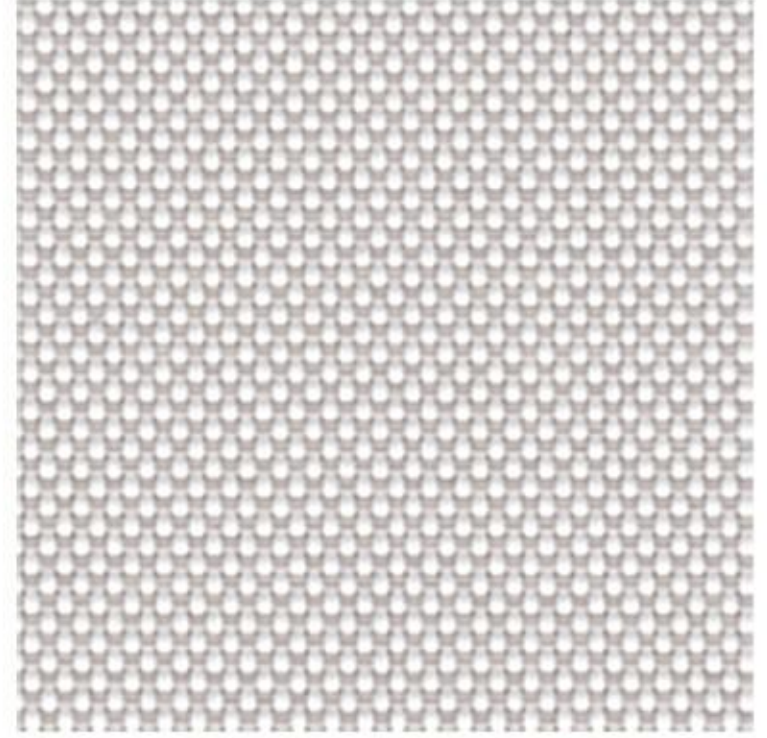


White * Pearl

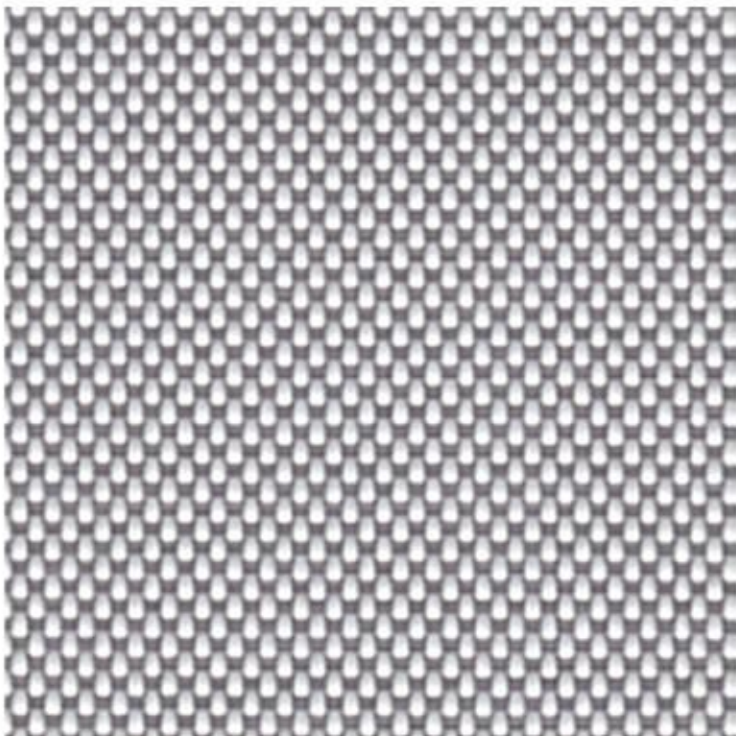

White * Grey

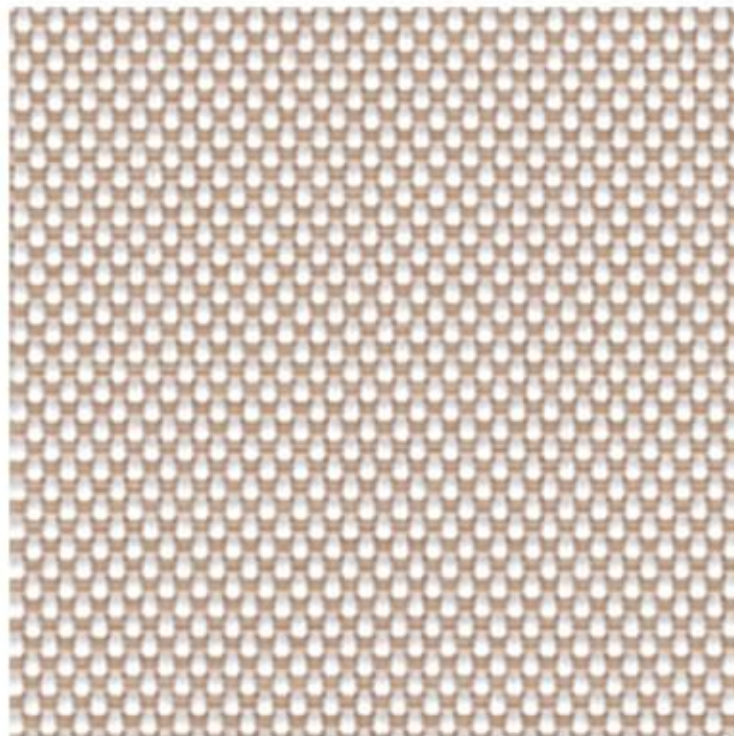


White * Sand

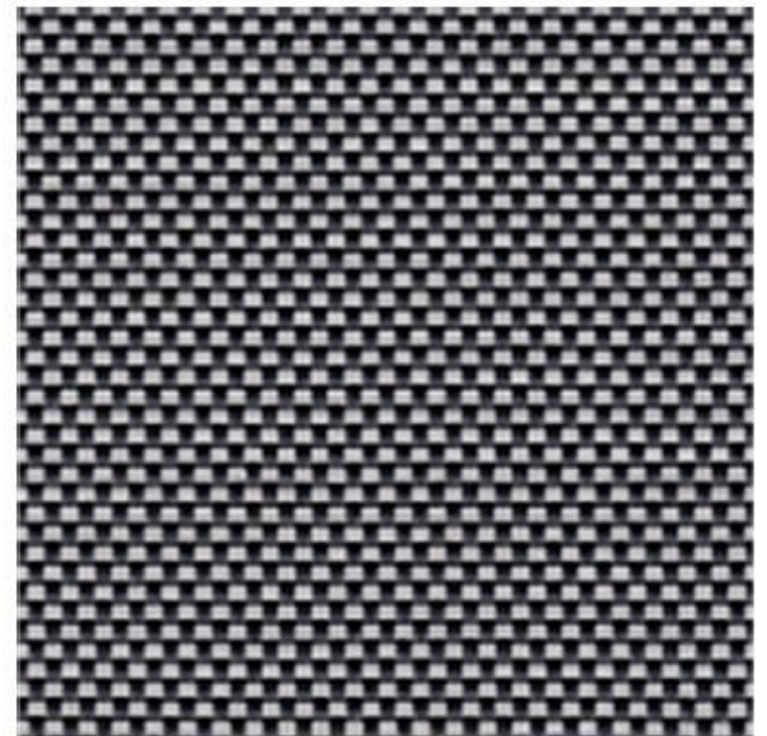

Black * Pearl



Black * Black

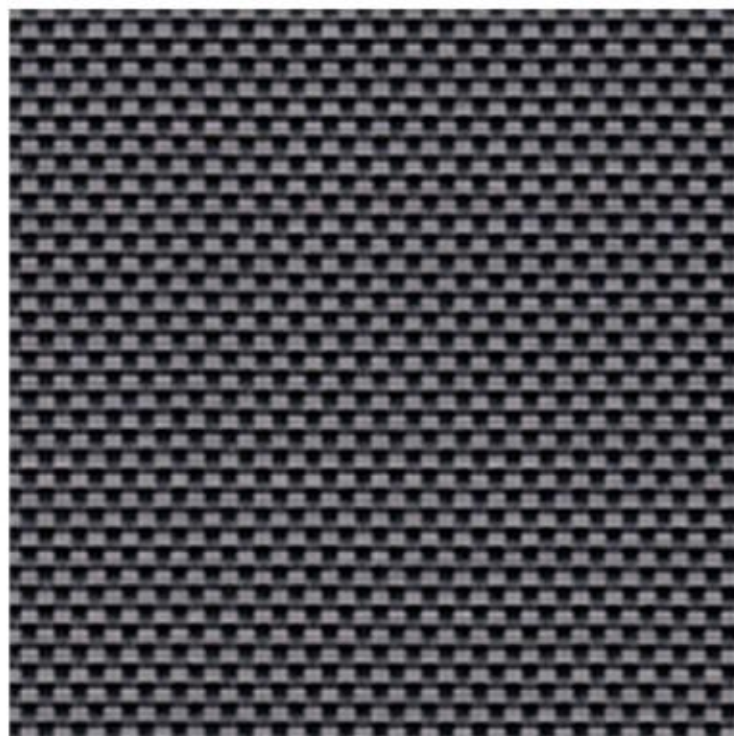

Black * Grey



Black * Brown

Fire, Smoke Classification

FR (US) - NFPA 701 TM#1

BS (GB) - 5867 Part2 TypeB

B1(CN) - GB50222

Health & Safety

Oeko-tex Standard 100 class IV

Greenguard® Gold

RoHS Directive (EU)2015/863

EN71 Part 3:1994

AATCC112-2014

GB18586 - 2001

Bacterial & Fungal Resistance

ASTM G21-09

ASTM E 2180-07 Reduce more than 99.9% of bacteria

Colour fastness to light

Grade 8 ISO105 B02:2014

≥4.0 AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp

Warranty

5 Years

Fire-retardant
&
Waterproof




Fire-retardant

Measurement and installation


Measurement and installation Matters need attention

The three-point measurement takes the minimum value
The width and height are normally reduced by 2~3mm

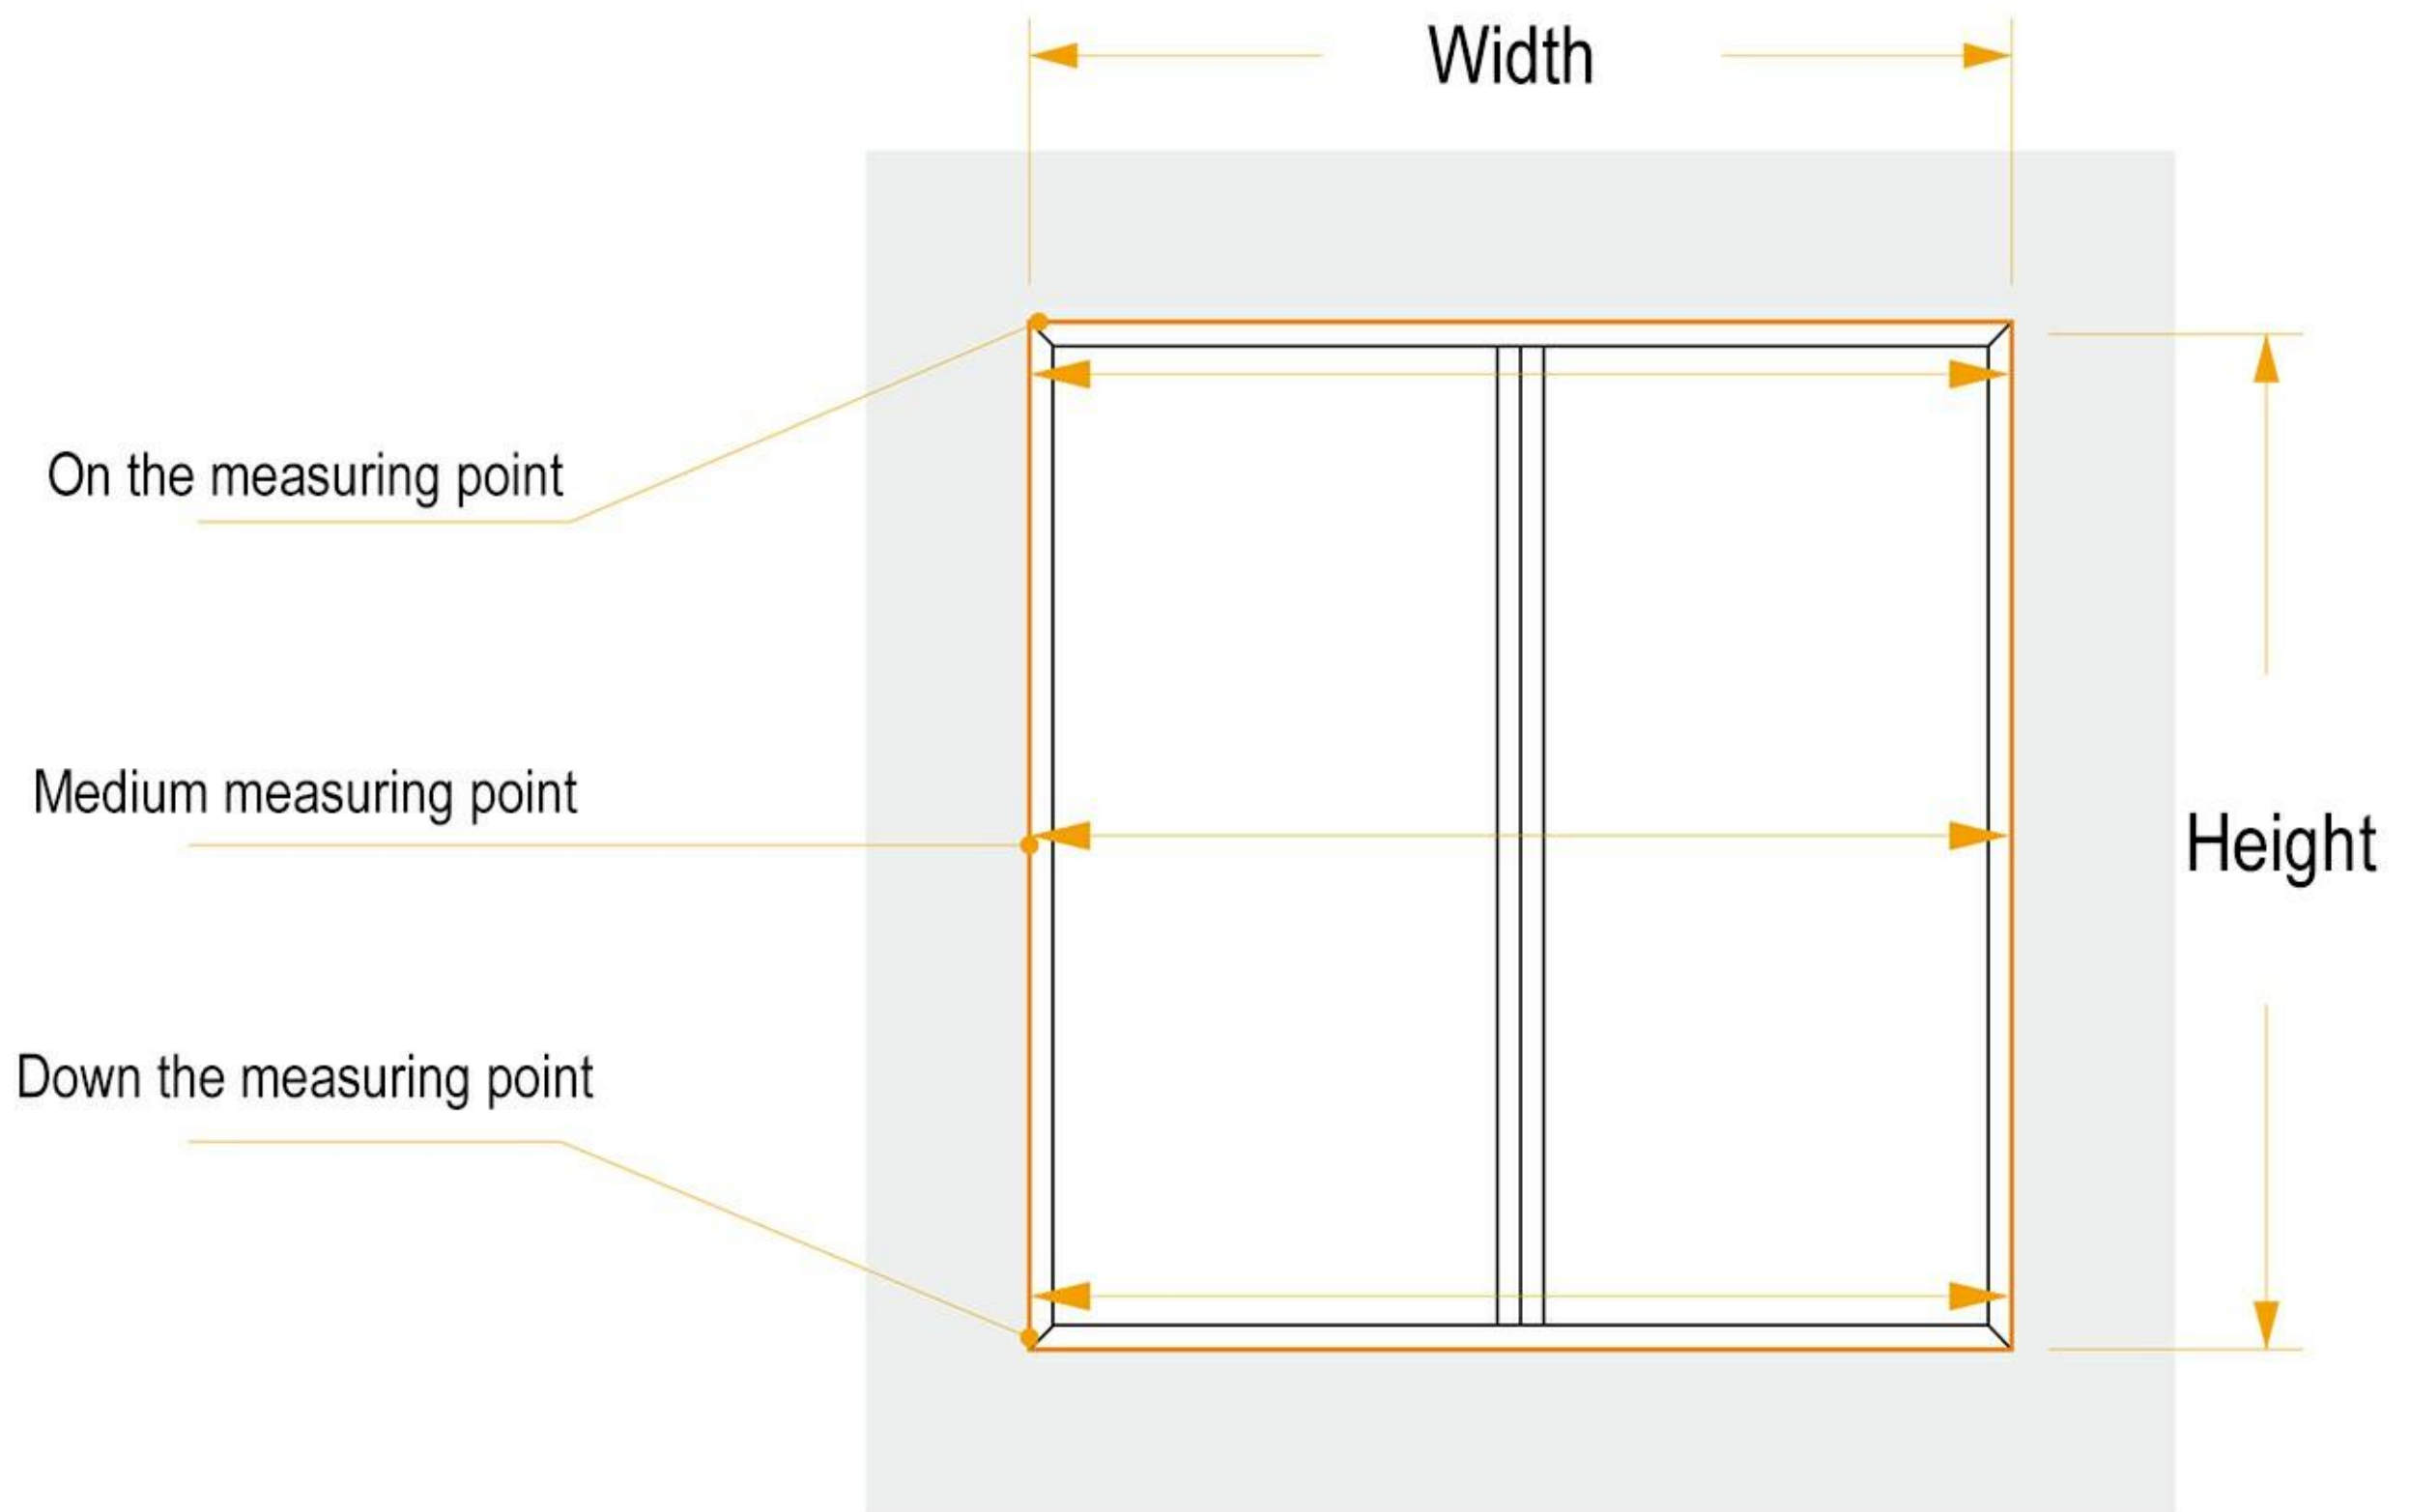

In case of a diagonal window frame

Under windproof curtain cover shell and side The mounting position of the rail in the window frame Determine the width and height of the windproof shutter

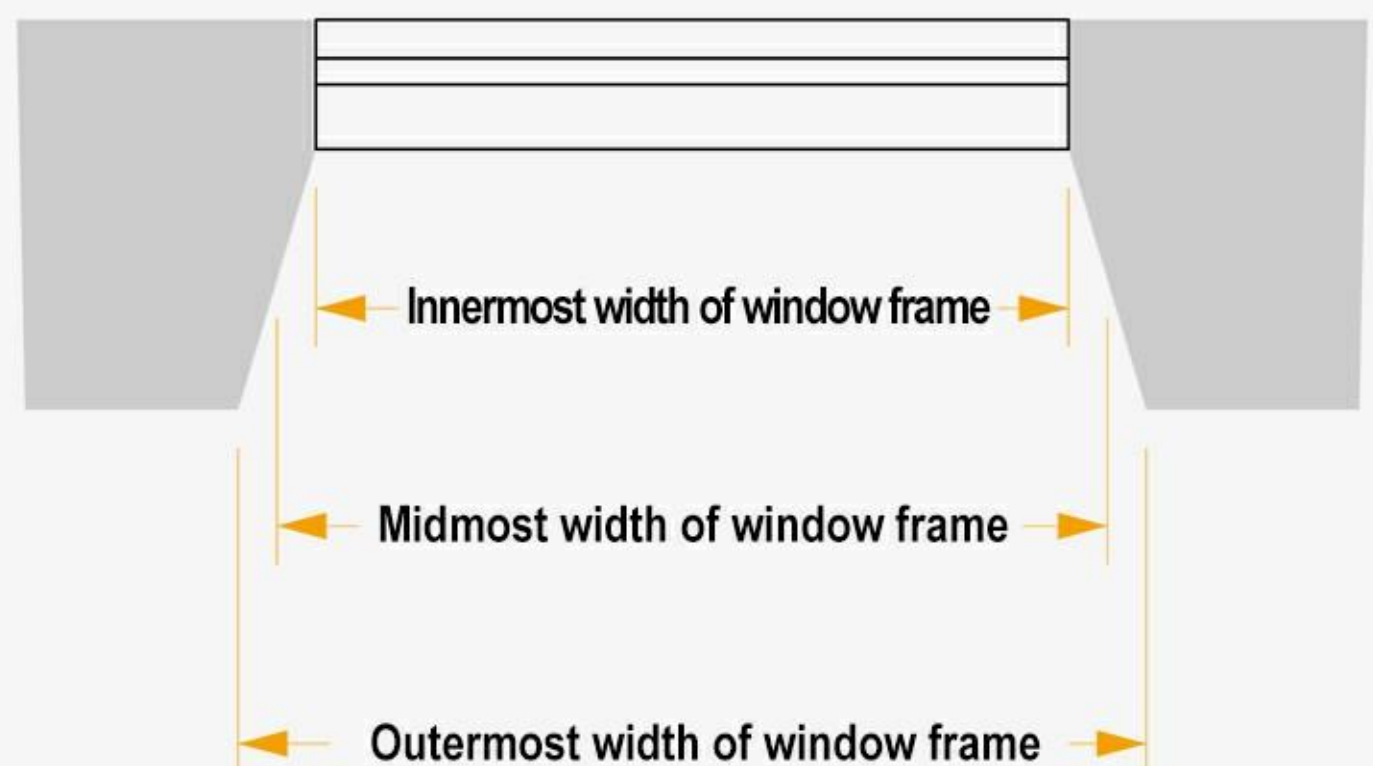


Installation Method of Rolling Curtain

Front mounting, Side mounting




**Front Mounting
(outside the frame)**

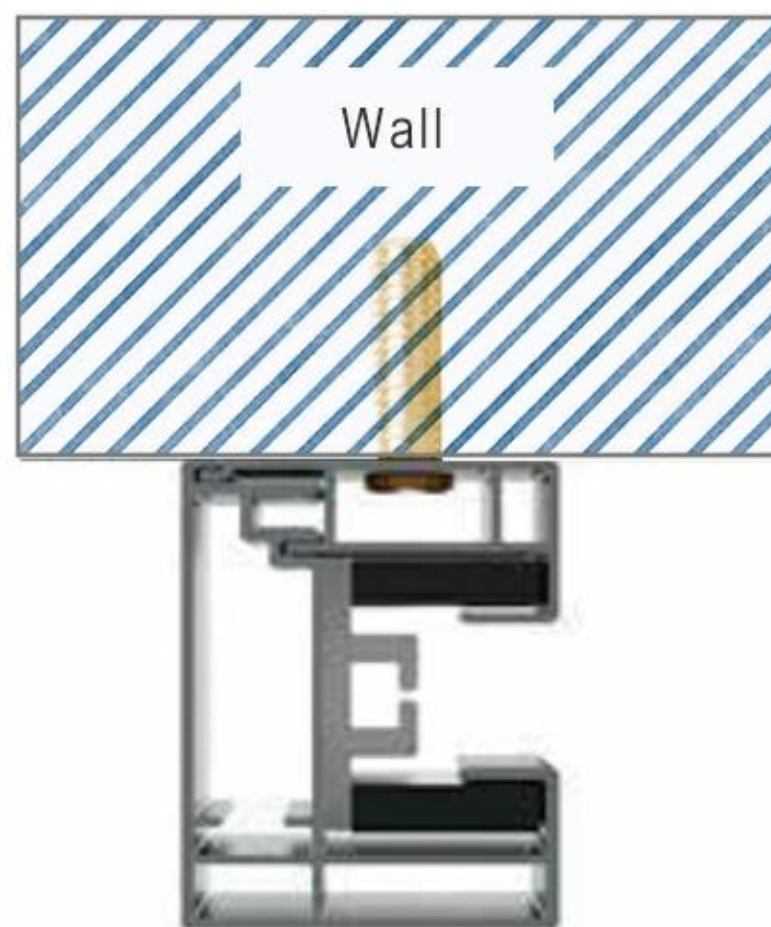

The track is mounted outside the frame and the track fixing screws are driven from the side of the track.



**Side Mounting
(inside the frame)**

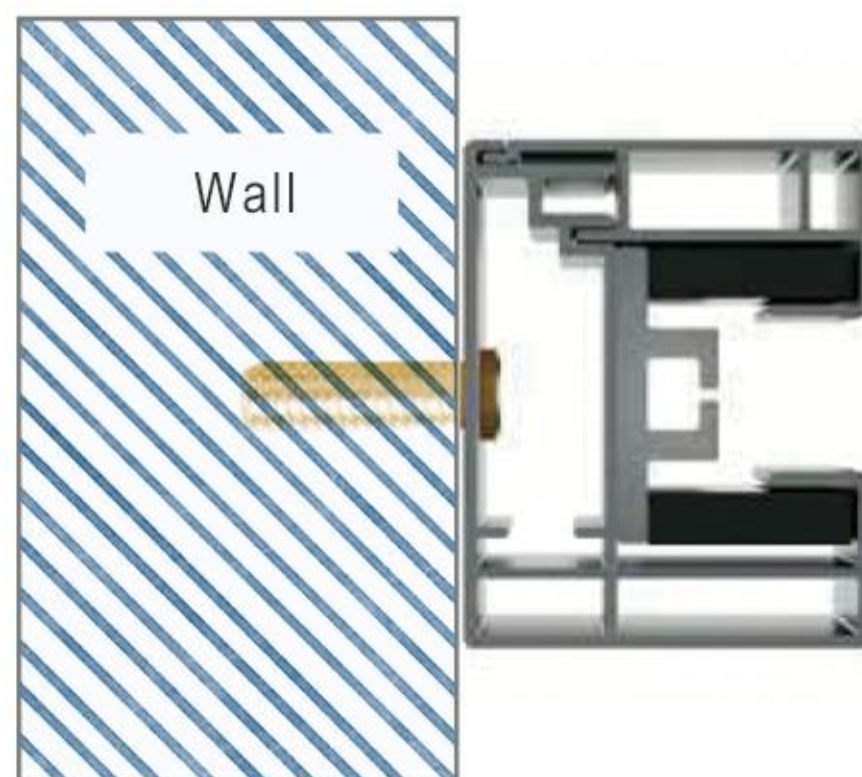

The track is installed in the frame and the track fixing screws are drawn from the underside of the track.

Measurement and installation Installation procedure

